

LIFETIME *Limited* WARRANTY


Jandon warrants this product to be leak and drip-free during normal household use for as long as it is owned by the original consumer purchaser.

Should a malfunction occur within the time covered by this warranty, replacement parts may be obtained from the place of purchase or from Jandon's Customer Service Department at toll free 877-526-3668. Jandon will, at Jandon's discretion, provide replacement parts for installation by consumer for any parts that prove defective under normal usage and service with new, like or equivalent Jandon parts.

This warranty shall not apply to goods which have been subject to accidents, negligence, improper installation, or misuse.

Our responsibility under this warranty is limited only to replacement of parts and no other costs.

This warranty covers the original consumer purchaser only and does not include business, commercial or industrial use of this product.

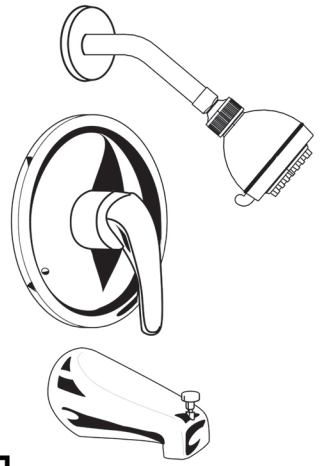

JANDON[®]
Useful Everyday


Single Handle Pressure Balanced Tub & Shower Set

JANDON[®] FAUCETS
Useful Everyday

© All rights reserved. 2011-2012

INSTALLATION INSTRUCTIONS


1. Turn off water supplies.
2. Install valve, making sure 'up' outlet is facing up. Connect water supplies to valve (hot water to left side and cold water to right side). Use thread seal compound or tape on all threaded connections to prevent leaks.
3. Connect shower and spout units to valve. If you have a shower only model, you will need to plug the pipe leading to the tub spout assembly. Likewise if you have a tub only model, you will need to plug the pipe to the shower head assembly. Do not attach showerhead to shower arm until after you have flushed the system.
4. After all connections are made, test and flush the system. Both hot and cold lines must be attached for the pressure balance valve to function properly. Turn on the water and check connections for leaks. Place handle on valve (do not tighten set screw) and flush lines by running hot and cold water uninterrupted for one minute.
5. Turn off the water and connect the showerhead.
6. Remove handle. Place valve escutcheon over valve assembly and secure with screws. Replace handle and tighten set screw.



SETTING LIMIT STOP

This valve includes a factory maximum water temperature preset.

WARNING: Failure to adjust the limit stop properly may result in serious scalding. This shower may not protect the user from scalding when there is a failure of other temperature controlling devices elsewhere in the system.



1. The temperature preset can be changed by first removing the handle and the handle stem adapter.
2. Remove the cartridge housing cap (1) by hand.
3. For a higher temperature, pull the red limit stop out with a long nose pliers, turn it counter clockwise and then push it back onto the cartridge.
4. For a lower temperature, pull the red limit stop out with a long nose pliers, turn it clockwise and then push it back onto the cartridge.
5. Reinstall the cartridge housing cap (1), stem adapter and handle.

FOR NEW INSTALLATIONS

An optional plaster guard has been included. This is used as a template for hole size and to protect the valve during installation.

Thank you for purchasing this **JANDON**® product. By following the care instructions in this booklet you will enjoy this quality item for many years to come.

JANDON® faucets are crafted with the skill and quality to last a lifetime. You can appreciate the fine craftsmanship in your own home with **JANDON** fixtures in contemporary designs, meticulously engineered with water and energy-saving features.

Care Instructions

To clean, wipe gently with a soft damp cloth, then wipe dry. **JANDON** finishes are very durable. However, to assure long lasting luster, harsh abrasives or polishes should be avoided.



Please Conserve Water!